



# MBs-W2C

---

Wi-Fi Communication Module

---

## Category

|                                                                               |           |
|-------------------------------------------------------------------------------|-----------|
| Table .....                                                                   | 2         |
| Figure .....                                                                  | 3         |
| <b>Chapter1. MBs-W2C Wi-Fi Communication Module Product Introduction.....</b> | <b>1</b>  |
| <b>1.1 Summary.....</b>                                                       | <b>1</b>  |
| <b>1.2 Product Function List.....</b>                                         | <b>1</b>  |
| <b>1.3 Product Specification .....</b>                                        | <b>2</b>  |
| <b>1.4 Product Appearance.....</b>                                            | <b>3</b>  |
| <b>1.5 Installation.....</b>                                                  | <b>4</b>  |
| <b>1.6 LINK LED Status.....</b>                                               | <b>4</b>  |
| <b>Chapter2. Wi-Fi Connection Setting .....</b>                               | <b>5</b>  |
| <b>2.1 PLC Application Interface Wi-Fi Setting.....</b>                       | <b>5</b>  |
| <b>2.2 Smart Config Wi-Fi Setting (SC).....</b>                               | <b>7</b>  |
| <b>2.3 MBs-W2C IP Searching.....</b>                                          | <b>9</b>  |
| <b>2.4 Wi-Fi RSSI.....</b>                                                    | <b>9</b>  |
| <b>Chapter3. MERITEK Standard Communication Service .....</b>                 | <b>10</b> |
| <b>Chapter4. Simple Network Time Protocol (SNTP).....</b>                     | <b>11</b> |
| <b>Chapter5. Firmware Upgrade (OTA).....</b>                                  | <b>13</b> |
| <b>Chapter6. MERITEK Standard Searching Service .....</b>                     | <b>14</b> |
| <b>6.1 Window Layout .....</b>                                                | <b>14</b> |
| <b>6.2 Functional Area and Properties .....</b>                               | <b>15</b> |
| <b>6.2.1 Scan.....</b>                                                        | <b>15</b> |
| <b>6.2.2 Device Found.....</b>                                                | <b>15</b> |
| <b>6.2.3 Option.....</b>                                                      | <b>16</b> |
| <b>6.2.4 Properties.....</b>                                                  | <b>17</b> |
| <b>6.3 Work Area.....</b>                                                     | <b>17</b> |
| <b>6.4 Properties Window .....</b>                                            | <b>18</b> |
| <b>Appendix A PLC Register Configuration Table .....</b>                      | <b>21</b> |

|                   |                                               |           |
|-------------------|-----------------------------------------------|-----------|
| <b>Appendix B</b> | <b>Time Zone Table.....</b>                   | <b>23</b> |
| <b>Appendix C</b> | <b>Access Point Compatibility Table .....</b> | <b>35</b> |

## Table

|                                                                                   |           |
|-----------------------------------------------------------------------------------|-----------|
| <b>Table 1: W2C Function List .....</b>                                           | <b>1</b>  |
| <b>Table 2: W2C Product Specification .....</b>                                   | <b>2</b>  |
| <b>Table 3: LINK LED Operation Mode.....</b>                                      | <b>4</b>  |
| <b>Table 4: PLC Register Config and Data Length Limitation .....</b>              | <b>5</b>  |
| <b>Table 5: IP Access Method.....</b>                                             | <b>9</b>  |
| <b>Table 6: Wi-Fi RSSI.....</b>                                                   | <b>9</b>  |
| <b>Table 7: TCP/UDP Port PLC Register Config .....</b>                            | <b>10</b> |
| <b>Table 8: PLC Register Config Description.....</b>                              | <b>12</b> |
| <b>Table 9: SNTP Functions and PLC Register Configuration .....</b>               | <b>12</b> |
| <b>Table 10: OTA Register Configuration Description .....</b>                     | <b>13</b> |
| <b>Table 11: W2C Configurator, Function Area and Properties introduction.....</b> | <b>15</b> |
| <b>Table 12: W2C Configurator Properties Window .....</b>                         | <b>20</b> |

## Figure

|                                                                                        |    |
|----------------------------------------------------------------------------------------|----|
| Figure 1: MBs-W2C Front and Back Appearance .....                                      | 3  |
| Figure 2: MBs-W2C Side Appearance .....                                                | 3  |
| Figure 3: WinProladder ASCII Table .....                                               | 6  |
| Figure 4: Build SSID ASCII table, edit table name and starting address .....           | 6  |
| Figure 5: Enter SSID Data.....                                                         | 7  |
| Figure 6: IOS – Esptouch APP.....                                                      | 7  |
| Figure 7: Android – Esptouch APP .....                                                 | 7  |
| Figure 8: Esptouch operation interface, display W2C IP when connect successfully ..... | 8  |
| Figure 9: Communication Service setting for WinProladder .....                         | 10 |
| Figure 10: W2C Configurator Window Layout.....                                         | 14 |

**Modify Record**

| <b>Version</b> | <b>Date</b> | <b>Name</b> |
|----------------|-------------|-------------|
| V1.0.0         | 2019/1/24   | Curtis Li   |
| V1.0.1         | 2019/1/24   | Edison Lin  |
| V1.0.2         | 2019/1/29   | Curtis Li   |
| V1.0.3         | 2019/1/29   | Ted Hung    |
| V1.0.4         | 2019/2/13   | Curtis Li   |
| V1.0.5         | 2019/2/27   | Curtis Li   |
| V1.0.6         | 2019/5/20   | Curtis Li   |
| V1.0.7         | 2019/11/18  | Oscar Wu    |

## Chapter1. MBs-W2C Wi-Fi Communication Module

### Product Introduction

#### 1.1 Summary

MBs-W2C is a Wi-Fi board plugged in the PLC, which enables wireless network transmission capability. In addition, as a wireless communication module, it supports Wi-Fi Station mode (STA mode) and needs to connect to router. In order to make the W2C settings easier and more convenient, the Smart Config function is provided to allow users to easily connect to the router via the mobile app. This module breaks the traditional PLC only through wired transmission, and the use is no longer subject to the physical network route. It can make multiple PLCs establish connections through one AP at the same time. It is superior to the traditional wired way in turns of maintenance.

#### 1.2 Product Function List

Table 1: W2C Function List

| Function                               | Description                                                                                                                                                                                                                                    |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Wi-Fi connection                       | Connect with router, wireless network transmission.                                                                                                                                                                                            |
| MERITEK Standard Communication Service | Communicate with any of the MERITEK standards and communicate with devices that exist on the same local area network.                                                                                                                          |
| SNTP                                   | Support SNTP                                                                                                                                                                                                                                   |
| Firmware Update                        | Firmware update using OTA (via wireless network).                                                                                                                                                                                              |
| MERITEK Standard Search Service        | Users can use the W2C Configurator (MERITEK Standard Search Service Communication Software) to search for W2C and other MERITEK devices in the same local area network, check their operating status and set related configuration to control. |

### 1.3 Product Specification

MBs-W2C supports Wi-Fi protocol IEEE 802.11 b/g/n and with frequency 2.4 GHz ~ 2.5GHz. Maximum TCP connections are up to 4.

**Table 2: W2C Product Specification**

| Category | Item                           | Characteristic                                                                                                                                                                                  |
|----------|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Wi-Fi    | Wi-Fi protocol                 | 802.11 b/g/n                                                                                                                                                                                    |
|          | Frequency Range                | 2.4 GHz ~ 2.5GHz (2400M ~ 2483.5M)                                                                                                                                                              |
|          | Transmit Power                 | 802.11 b: +20 dBm                                                                                                                                                                               |
|          |                                | 802.11 g: +17 dBm                                                                                                                                                                               |
|          |                                | 802.11 n: +14 dBm                                                                                                                                                                               |
|          | Receiving Sensitivity          | 802.11 b: -91 dBm (11 Mbps)                                                                                                                                                                     |
|          |                                | 802.11 g: -75 dBm (54 Mbps)                                                                                                                                                                     |
|          |                                | 802.11 n: -72 dBm (MCS7)                                                                                                                                                                        |
|          | Antenna                        | PCB on-board antenna                                                                                                                                                                            |
|          | Wi-Fi Signal Range             | The quality of Wi-Fi communication depends on the level of interference in the environment. MBs-W2C proves well communicating in the range within 30M in open wide space with low interference. |
| Hardware | CPU                            | Tensilica L106 32-bit processor                                                                                                                                                                 |
|          | Operating Voltage              | 2.5V ~ 3.6V                                                                                                                                                                                     |
|          | Operating Current              | Average current: 80 mA                                                                                                                                                                          |
|          | Range of Operating Temperature | 0°C ~ 60°C                                                                                                                                                                                      |
| Software | Wi-Fi Mode                     | Station                                                                                                                                                                                         |
|          | Security Protocol              | WPA/WPA2                                                                                                                                                                                        |
|          | Encryption                     | WEP/TKIP/AES                                                                                                                                                                                    |
|          | Firmware Update                | OTA (via Network)                                                                                                                                                                               |
|          | Network Protocol               | IPv4, TCP/UDP                                                                                                                                                                                   |
|          | Maximum TCP Connections        | 4                                                                                                                                                                                               |

## 1.4 Product Appearance

MBs-W2C Wi-Fi communication board appearance shown as **Figure 1** and **Figure 2**, simply introduce as follow:

- ① LINK LED: Located below the Link label, display the operational status of W2C, such as connection, disconnection and firmware update, etc. For more LED status information please refer to **1.6-LINK LED**.
- ② Mini Din Connector: Connector type of MBs-W2C Wi-Fi module, connect through port 0, with 4 pins and support RS232.

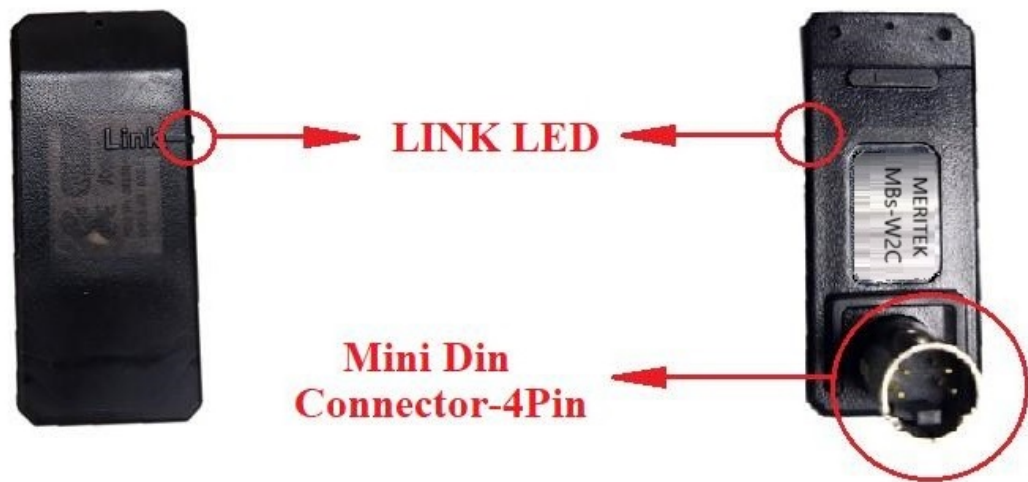


Figure 1: MBs-W2C Front and Back Appearance

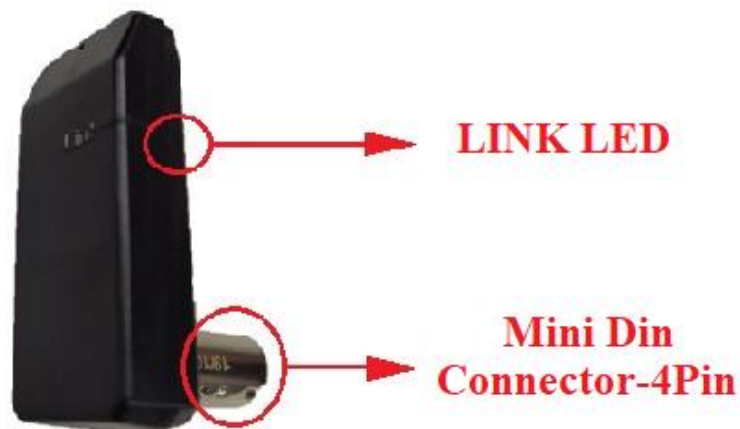


Figure 2: MBs-W2C Side Appearance

## 1.5 Installation

Directly plugged MBs-W2C in port 0 (port 1 for MHB1 series). It can automatically detect the baud rate. After the detection, it will set the port 0 (port 1 for MHB1 series) baud rate as 115200 bps.

If using MHB1 series PLC, please update the firmware version of W2C to V1.3.1 or above. The baud rate of the port 1 cannot use 4800 bps. For instructions on firmware upgrade, please refer to **Chapter5 Firmware Upgrade (OTA)**.

## 1.6 LINK LED Status

LINK LED is in red, the LED will have different signal status depends on MBs-W2C currently state. **Table 3** shows the various signal status of LED.

**Table 3: LINK LED Operation Mode**

| Connection Status    | LINK LED                |
|----------------------|-------------------------|
| Connecting           | On and off every 3 secs |
| Disconnected         | Off                     |
| Execute Smart Config | Continuous flash        |
| Execute OTA          | Triple flash            |

## Chapter2. Wi-Fi Connection Setting

By installing the MBs-W2C Wi-Fi communication module, the PLC can connect to the router for wireless network connection and transmission. Currently, the wireless network connection can be set in the following two ways:

- Setting through the PLC application interface.
- Setting through mobile App under Smart Config (SC) mode.

### 2.1 PLC Application Interface Wi-Fi Setting

According to the PLC register configuration in **Table 4**, please create two ASCII tables for SSID and Password and enter the Wi-Fi account and password you want to connect into their respective tables. As shown in **Figure 3~Figure 5**, please note that SSID and Password must be enclosed in single quotes.

After the connection is successful, the LINK LED will flash at 3s intervals (3 seconds on, 3 seconds off). If you want to reconnect or connect other router, just write any value to R904, and the W2C will reconnect according to the information of the current register.

**Table 4: PLC Register Config and Data Length Limitation**

| Item               | PLC register config | Data Length Limitation |
|--------------------|---------------------|------------------------|
| SSID               | R850 – R868         | 32Bytes                |
| Password           | R869 – R903         | 64 Bytes               |
| Trigger Connection | R904                |                        |

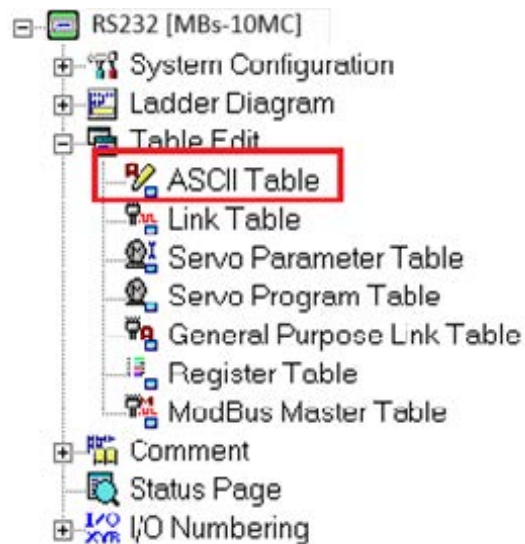


Figure 3: WinProladder ASCII Table

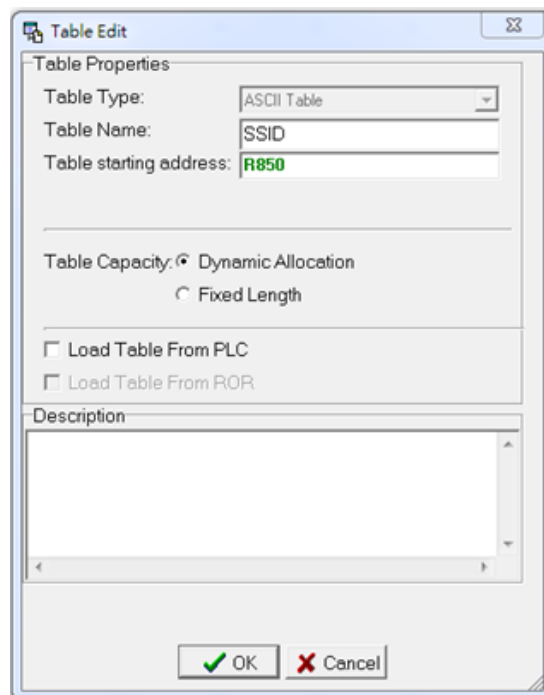


Figure 4: Build SSID ASCII table, edit table name and starting address

The starting address should match the following address:

SSID: R850~R868

Password: R869~R903

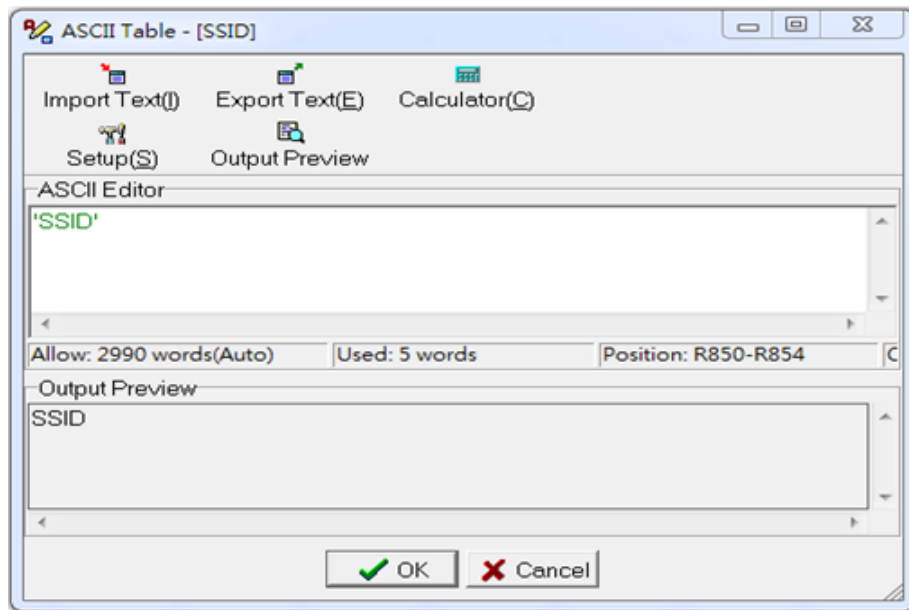


Figure 5: Enter SSID Data

## 2.2 Smart Config Wi-Fi Setting (SC)

For the convenience of use, the Smart Config connection method is also provided. First you need to download the mobile app - Esptouch (support in iOS / Android), as shown below. Esptouch sends the SSID and Password of the router via UDP broadcast. W2C connects according to the information received.



Figure 6: IOS – Esptouch APP

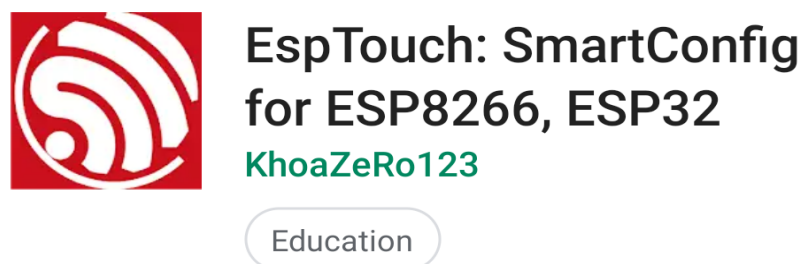


Figure 7: Android – Esptouch APP

To put the W2C into the Smart Config mode, needs to switch the W2C rapidly **3 times** in succession.

After the W2C is powered on, it must be powered off within three seconds. After repeating twice, the Smart Config mode will be enabled when the third power is turned on.

After entering the SC mode, W2C starts waiting for Esptouch broadcast information. At this time, the LED will flash continuously to indicate that the APP can start transmitting, the longest waiting time is 60 seconds.

If the connection fails after 60 seconds (such as wrong information, unstable network quality), W2C will enter the PLC application interface mode and connect through information stored in PLC before.

Since the Smart Config connection method is subject to the hardware compatibility, we provide **Appendix C-Access Point Compatibility Table** for users to choose the appropriate mobile phone for connection settings.

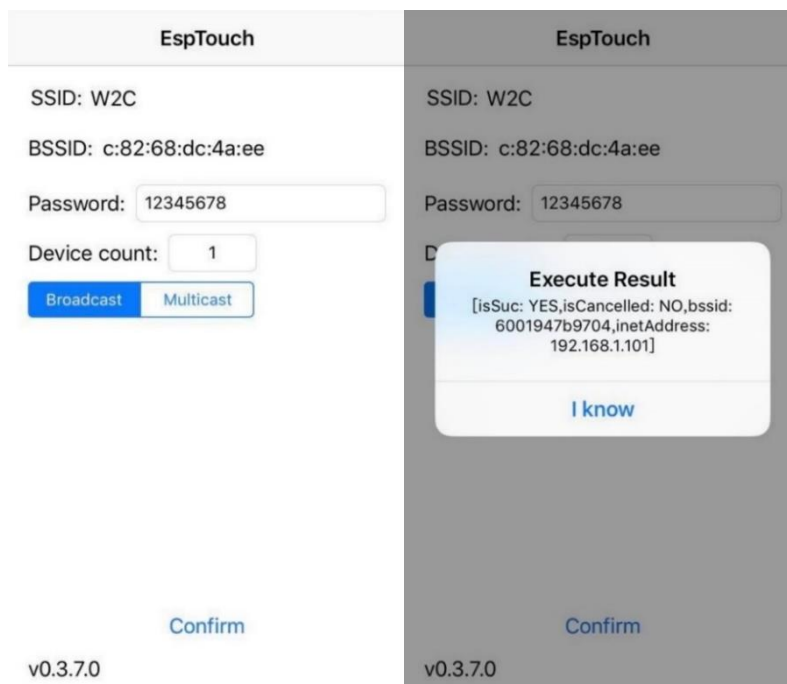


Figure 8: Esptouch operation interface, display W2C IP when connect successfully

### 2.3 MBs-W2C IP Searching

After the MBs-W2C is connected to the AP, the W2C IP address can be viewed in two ways (**Table 5**), and other devices can be connected to the PLC.

**Table 5: IP Access Method**

| Item                                   | Description                                                                   |
|----------------------------------------|-------------------------------------------------------------------------------|
| Smart Config                           | Display on mobile APP                                                         |
| MERITEK Standard Communication Service | Display on MERITEK standard communication service software (W2C Configurator) |

### 2.4 Wi-Fi RSSI

Wi-Fi RSSI is an indicator for measuring the strength of the signal received by the device in wireless communication. In order to monitor the connection quality of the W2C, the user can view it through the register R949 of the PLC. As shown in

**Table 6**, the signal strength is shown. Expressed as a negative number, the unit is dBm, the value range is 0 ~ -100, the closer to 0, the better the signal strength.

**Table 6: Wi-Fi RSSI**

| PLC Register Config | Wi-Fi RSSI | Signal Strength |
|---------------------|------------|-----------------|
| R949                | >-50       | Good            |
|                     | -50~ -70   | Normal          |
|                     | -70~ -90   | Bad             |
|                     | <-90       | No Signal       |

### Chapter3. MERITEK Standard Communication Service

PLC has wireless network communication capability by plugging MBs-W2C Wi-Fi communication module. It can communicate with objects such as WinProladder that use MERITEK standard communication in the same local area network. Supporting IPv4 and TCP/UDP protocols, can up to 4 TCP connections at the same time. Default port of TCP/UDP are 500, it can be modified by PLC register, shown as **Table 7**.


**Table 7: TCP/UDP Port PLC Register Config**

| LED      | PLC register config |
|----------|---------------------|
| TCP Port | R946                |
| UDP Port | R947                |

In order to ensure the successful exchange of communication data in a wireless environment, it is recommended to set the **Time out** and **Retry** as follow:

- Time out : 3 sec
- Retry : 5 times

WinProladder setting method can refer to **Figure 9**

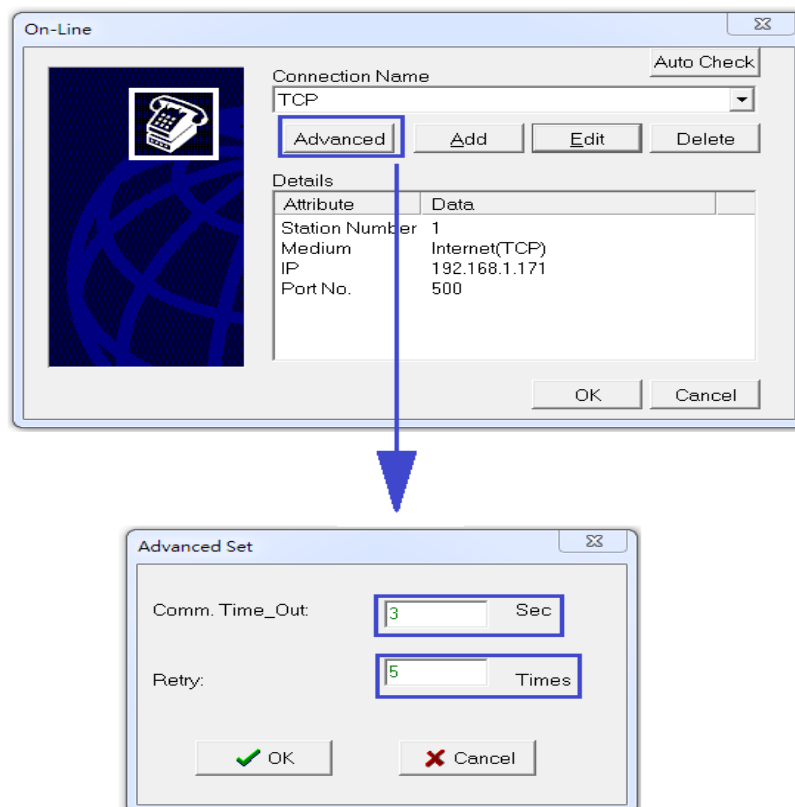

**Figure 9: Communication Service setting for WinProladder**

## Chapter4. Simple Network Time Protocol (SNTP)

In addition to the above functions, the PLC with the MBs-W2C Wi-Fi communication module can be used to perform network time correction via the NTP Server and support two synchronization modes according to different PLC register value.

- Sync mode 1: Synchronize time back to PLC RTC.  
(For more details can refer PLC user manual 2 advanced application chapter15: RTC)
- Sync mode 2: Synchronize time back to specified PLC register.

The user can flexibly select different mode according to individual needs. The PLC register configuration of these two modes is shown in **Table 8**.

In addition, W2C will automatically perform time correction with NTP Server at the following timing, and update the time to the PLC registers.

- ① When W2C is **powered on**, the time of W2C and time in corresponding PLC registers according to the mode will be synchronized with NTP server.
- ② **Every 24 hours after powered on**, the time of W2C and time in corresponding PLC registers according to the mode will be synchronized with NTP server.

The W2C also provides the user to manually update the time to the PLC register. Simply set the value of the register R908 to 1, and the time will be updated to the corresponding register according to the selected mode.

In addition, if you want to change the time zone, you can refer to **Appendix B-Time Zone Table**. The time zone is the daylight time (if there is one in the area), input the index value of the desired area into the register R910, and then input 1 to the register to R908, the time will be updated.

If the entered index value is exceeded or not in the Appendix B table, the system default area is Taipei.

If the SNTP server needs to be changed to another server, the new URL can be written to the register and enable the corresponding PLC register to notify W2C there's a new setting needs to be changed, default setting of SNTP server is "pool.ntp.org", W2C will synchronize time with SNTP server every 24 hours after powered on, the functions of SNTP and the configuration of the PLC register are shown in

**Table 9.**

**Table 8: PLC Register Config Description**

| (Mode 1/Mode 2) | Description   |
|-----------------|---------------|
| R4128/D3953     | (Second) 0-59 |
| R4129/D3954     | (Minute) 0-59 |
| R4130/D3955     | (Hour) 0-23   |
| R4131/D3956     | (Day) 1-31    |
| R4132/D3957     | (Month) 1-12  |
| R4133/D3958     | (Year) 0-99   |
| R4134/D3959     | (Week) 0-6    |

**Table 9: SNTP Functions and PLC Register Configuration**

| PLC register | SNTP function                                                           |
|--------------|-------------------------------------------------------------------------|
| R907         | After setting the SNTP server URL, notify W2C to update the Server URL. |
| R908         | Synchronize time back to PLC register immediately.                      |
| R909         | Synchronize time back to PLC mode:<br>1: mode 1<br>0: mode 2            |
| R910         | Setting location index<br>For example: Taipei area set to 86            |
| R911-R942    | Setting SNTP server URL<br>For example: time.google.com                 |

## Chapter5. Firmware Upgrade (OTA)

OTA is a function to update the W2C firmware through the cloud. W2C will check the version information in the "w2c\_info" file on the cloud to determine whether it needs to be updated. If a new version is found, the PLC corresponding register will be set to 1, means users can update new firmware for the W2C.

W2C will check the latest version on the cloud when it connects to AP and every morning 00:01.

When the user wants to update the firmware, W2C will check whether the cloud has a new version. If there is, the W2C will immediately update the firmware of the OTA. If it is not found, it will go to the cloud to check the version information again. The result will be checked. Decide whether to allow updates.

When updating the firmware, LINK LED will flash three times per second then off one second, PLC register configuration description as **Table 10**.

**Table 10: OTA Register Configuration Description**

| PLC register | Description                                                                                  |
|--------------|----------------------------------------------------------------------------------------------|
| R905         | Result for the version check of W2C<br>0: No newer version<br>1: Can update to newer version |
| R906         | After setting value > 0, W2C will decide whether the update is needed.                       |

## Chapter6. MERITEK Standard Searching Service

W2C Configurator is a communication software provided by MERITEK standard searching service. Users can use this software to search for W2C devices in the same local network to check their execution status and set related configuration if needed.

### 6.1 Window Layout

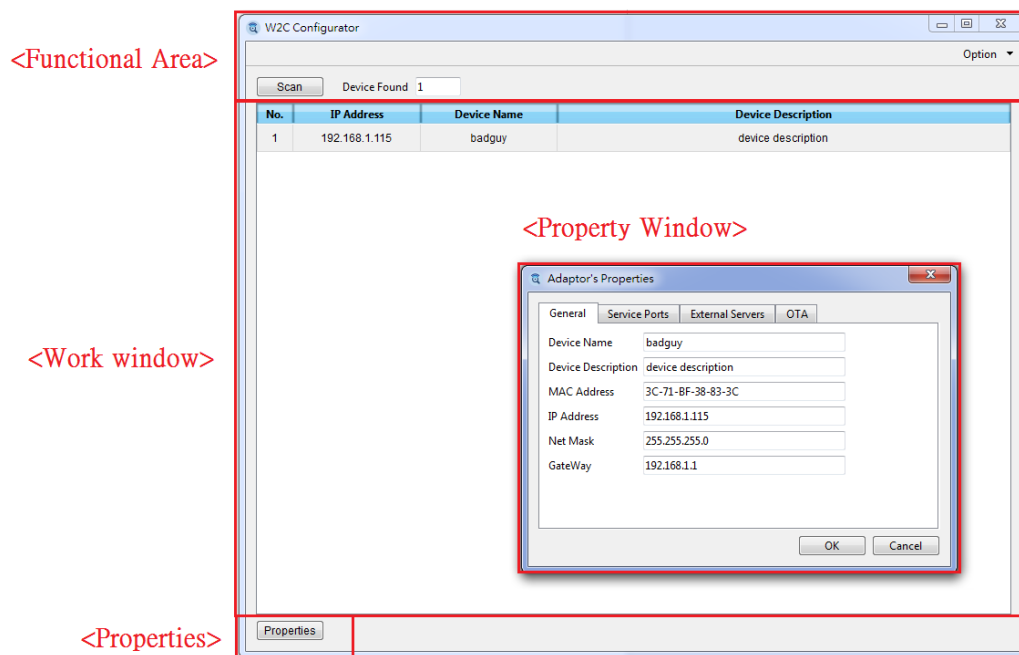


Figure 10: W2C Configurator Window Layout

## 6.2 Functional Area and Properties

The functional area provides the user to scan the W2C devices in the same local area network, also provides related settings. When press the properties button, the properties window will pop up to display more detailed information of scanned device. **Table 11** shows the functions in these areas, and more details are introduced in later sections.

**Table 11: W2C Configurator, Function Area and Properties introduction**

| Function     | Description                                                                                 |
|--------------|---------------------------------------------------------------------------------------------|
| Scan         | Searching for the W2C devices in the same local network.                                    |
| Device Found | Record the number of scanned devices.                                                       |
| Option       | Includes Select Network, Scan Setting, Language and About for viewing the software version. |
| Properties   | Press the button to display the scanned device properties.                                  |

### 6.2.1 Scan


Searching for W2C devices in the same local network.



### 6.2.2 Device Found



Record the number of scanned W2C devices.

### 6.2.3 Option

Provide users to select scanning network, scan setting, language and W2C configurator information.


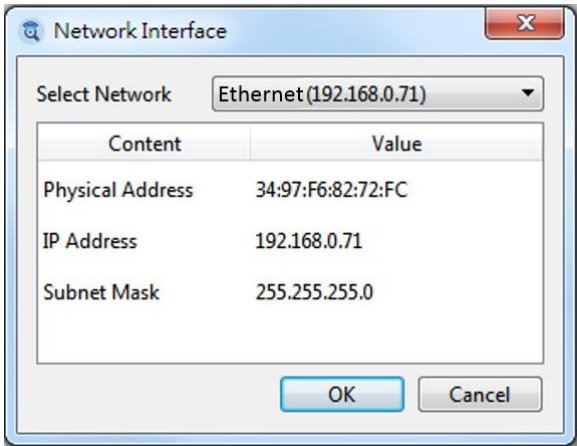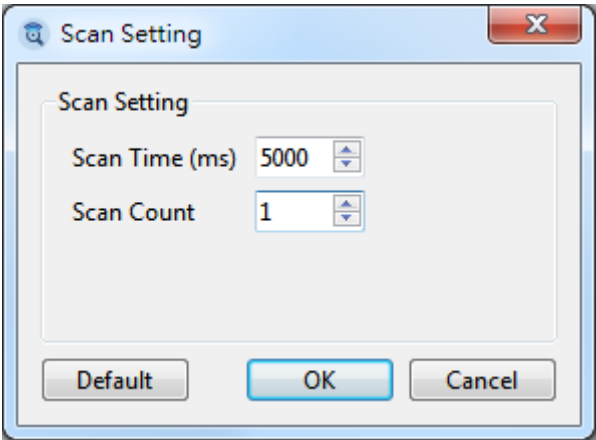
| Function         | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |         |       |                  |                   |            |              |             |               |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-------|------------------|-------------------|------------|--------------|-------------|---------------|
| Select Network   | <p>You can select any network interface as the local network to be scanned, and the IP address, MAC address, and subnet mask of selected network interface are displayed in the window.</p>  <table border="1"> <thead> <tr> <th>Content</th><th>Value</th></tr> </thead> <tbody> <tr> <td>Physical Address</td><td>34:97:F6:82:72:FC</td></tr> <tr> <td>IP Address</td><td>192.168.0.71</td></tr> <tr> <td>Subnet Mask</td><td>255.255.255.0</td></tr> </tbody> </table> | Content | Value | Physical Address | 34:97:F6:82:72:FC | IP Address | 192.168.0.71 | Subnet Mask | 255.255.255.0 |
| Content          | Value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |         |       |                  |                   |            |              |             |               |
| Physical Address | 34:97:F6:82:72:FC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |         |       |                  |                   |            |              |             |               |
| IP Address       | 192.168.0.71                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |         |       |                  |                   |            |              |             |               |
| Subnet Mask      | 255.255.255.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |         |       |                  |                   |            |              |             |               |
| Scan Setting     | <p>Can decrease or increase the scanning time depends on the situation, scan count can also be adjusted, default scan time is 5000ms and scan count is 1 time.</p>                                                                                                                                                                                                                                                                                                       |         |       |                  |                   |            |              |             |               |
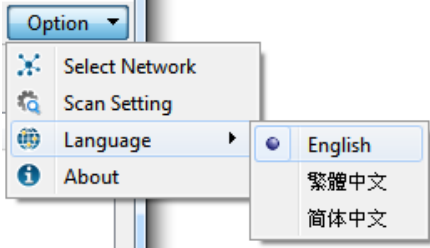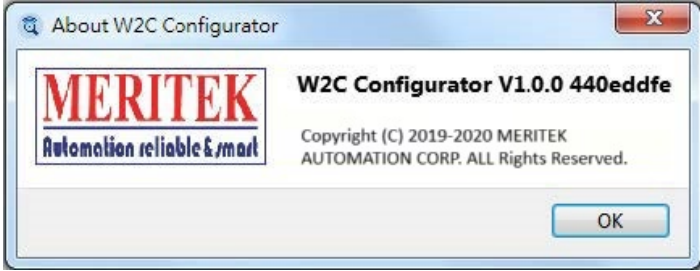
|          |                                                                                                                                                                  |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Language | <p>Provide English, Traditional Chinese and Simplified Chinese for users.</p>  |
| About    | <p>Display W2C Configurator version.</p>                                       |

### 6.2.4 Properties



Displays the properties window of the W2C devices found in the same local area network.



## 6.3 Work Area

Displays the W2C device scanned in the same local area network and indicates the IP address, device name, and device description of the device.

## 6.4 Properties Window

Display the detailed information of the selected W2C device. Displayed items includes General, Service Ports, External Servers, and OTA. The access property of these information items, please refer to **Table 12**.
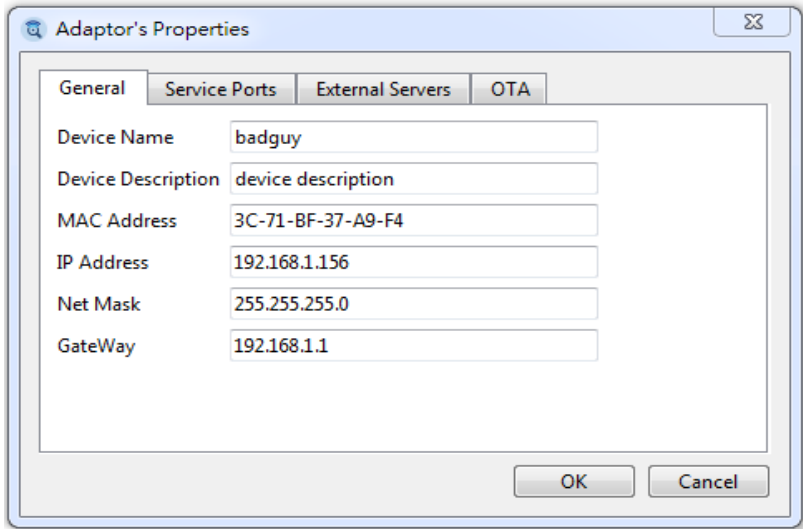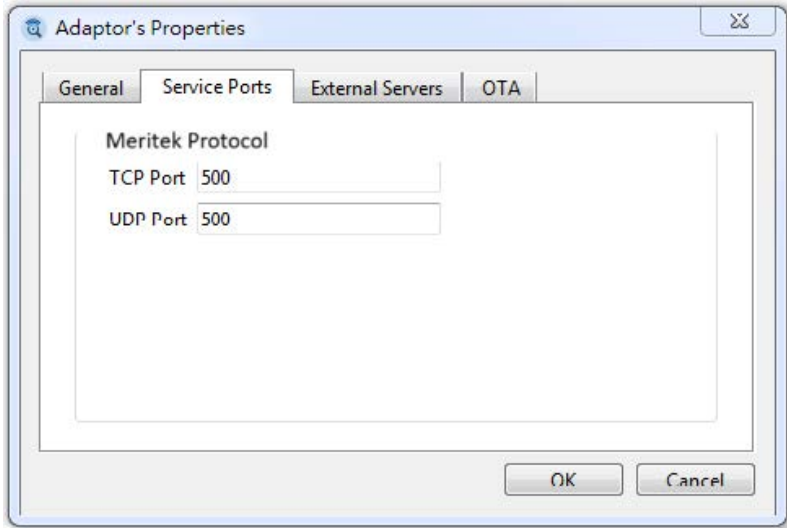
| Function         | Description                                                                                                                                                                                                                                    |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| General          | <p>Display device name, device description and IP address, etc. Users can modify Device Name and Device Description to differentiate multiple devices.</p>  |
| Service Ports    | <p>Display the TCP/UDP Port of the device, default TCP/UDP Port are 500.</p>                                                                               |
| External Servers | <p>SNTP server setting, it's able to view the time of W2C and can change the URL of NTP server for network time correction. In addition, you can also select the desired time zone and</p>                                                     |
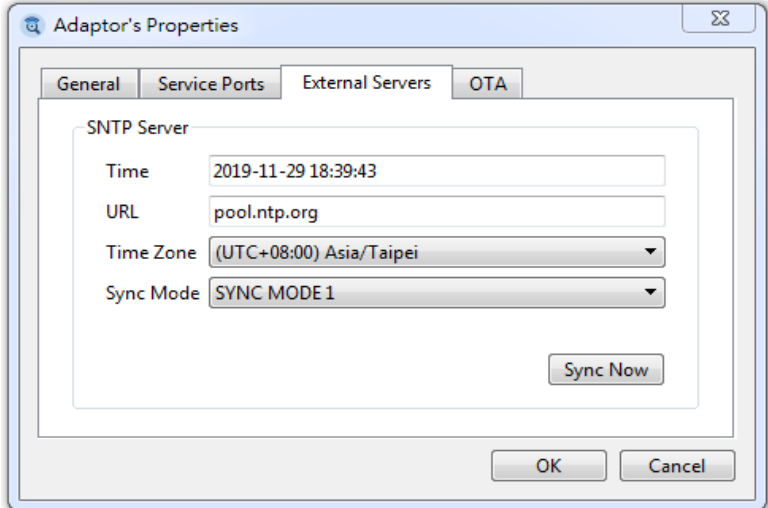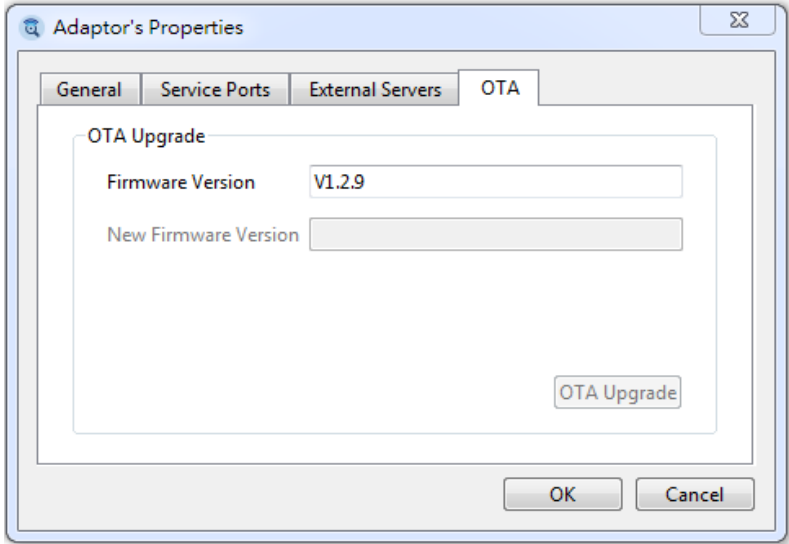
|     |                                                                                                                                                                                                                                                                                                                                                                                         |
|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|     | <p>synchronization mode to directly update the time to the corresponding PLC register.</p> <p>It is important to note that the device must be rescanned after synchronization, so the time field will be displayed as the updated time.</p> <p>Default value of the NTP Server URL: pool.ntp.org</p>  |
| OTA | <p>Display current firmware version of W2C. if there is newer firmware available for updating, then it is displayed in New Firmware Version field, user can upgrade by pressing button OTA Upgrade.</p>                                                                                             |

**Table 12: W2C Configurator Properties Window**

| Item             |                      | R/W | Note                                                                             |
|------------------|----------------------|-----|----------------------------------------------------------------------------------|
| General          | Device Name          | RW  |                                                                                  |
|                  | Device Description   | RW  |                                                                                  |
|                  | MAC Address          | RO  |                                                                                  |
|                  | IP Address           | RO  |                                                                                  |
|                  | Subnet Mask          | RO  |                                                                                  |
|                  | Gateway              | RO  |                                                                                  |
| Service Ports    | TCP Port             | RW  |                                                                                  |
|                  | UDP Port             | RW  |                                                                                  |
| External Servers | Time                 | RO  |                                                                                  |
|                  | URL                  | RW  |                                                                                  |
|                  | Time Zone            | RW  |                                                                                  |
|                  | Sync Mode            | RW  |                                                                                  |
| OTA              | Firmware Version     | RO  | Current version of W2C.                                                          |
|                  | New Firmware Version | RO  | W2C updatable version, it is not displayed if the current version is the latest. |

## Appendix A PLC Register Configuration Table

| Category      | Item                     | PLC register config | Mode | Data Length Limitation | Note                                                                                             |
|---------------|--------------------------|---------------------|------|------------------------|--------------------------------------------------------------------------------------------------|
| AP connection | SSID                     | R850 – R868         | RW   | 32 B                   |                                                                                                  |
|               | Password                 | R869 – R903         | RW   | 64B                    |                                                                                                  |
|               | Trigger connection       | R904                | RW   |                        | Trigger when is not 0.                                                                           |
| OTA           | Firmware has new version | R905                | RO   |                        | If is 1 means there is new version can update.                                                   |
|               | Update firmware          | R906                | RW   | 2B                     | Trigger when is not 0. After triggered, OTA will update firmware under W2C permission.           |
| SNTP          | SNTP trigger             | R907                | RW   | 2B                     | Trigger when is not 0. After triggered, update the server URL setting that is on the PLC to W2C. |
|               | SYNC NOW                 | R908                | RW   | 2B                     | Trigger when is not 0. After triggered, synchronize W2C time to PLC D3953~D3959.                 |
|               | SYNC MODE                | R909                | RW   | 2B                     | Synchronize time back to PLC mode.                                                               |
|               | TIMEZONE NUMBER          | R910                | RW   | 2B                     | Setting time zone index.                                                                         |
|               | SNTP URL                 | R911 – R945         | RW   | 64B                    | Setting SNTP server URL.                                                                         |

|                       |              |                        |    |    |                                                                             |
|-----------------------|--------------|------------------------|----|----|-----------------------------------------------------------------------------|
|                       | SYNC MODE 1  | R4128 – R4134<br>M1952 | RO |    | Synchronize mode 1, directly synchronize the time on W2C to RTC on the PLC. |
|                       | SYNC MODE 2  | D3953 – D3959          | RO |    | Synchronize mode 2, synchronize the time on W2C to PLC register.            |
| TCP                   | TCP Port     | R946                   | RW | 2B | Trigger when is not 0. Change port number.                                  |
| UDP                   | UDP Port     | R947                   | RW | 2B | Trigger when is not 0. Change port number.                                  |
| System Command        | System Reset | R948                   | RW |    | Trigger when is not 0.                                                      |
| Wi-fi Signal Strength | RSSI         | R949                   | R  |    | Current Wifi signal quality.                                                |

## Appendix B Time Zone Table

| Country                          | Index | Country                      | Index |
|----------------------------------|-------|------------------------------|-------|
| (UTC+14:00)Pacific/Kiritimati    | 1     | (UTC+01:00)Europe/Stockholm  | 257   |
| (UTC+13:00)Pacific/Apia          | 2     | (UTC+01:00)Europe/Tiran      | 258   |
| (UTC+13:00)Pacific/Enderbury     | 3     | (UTC+01:00)Europe/Vaduz      | 259   |
| (UTC+13:00)Pacific/Fakaofo       | 4     | (UTC+01:00)Europe/Vatican    | 260   |
| (UTC+13:00)Pacific/Tongatapu     | 5     | (UTC+01:00)Europe/Vienna     | 261   |
| (UTC+12:45)Pacific/Chatham       | 6     | (UTC+01:00)Europe/Warsaw     | 262   |
| (UTC+12:00)Antarctica/McMurdo    | 7     | (UTC+01:00)Europe/Zagreb     | 263   |
| (UTC+12:00)Antarctica/South_Pole | 8     | (UTC+01:00)Europe/Zurich     | 264   |
| (UTC+12:00)Pacific/Auckland      | 9     | (UTC+01:00)Poland            | 265   |
| (UTC+12:00)Asia/Anadyr           | 10    | (UTC+01:00)Africa/Windhoek   | 266   |
| (UTC+12:00)Asia/Kamchatka        | 11    | (UTC+00:00)Africa/Abidjan    | 267   |
| (UTC+12:00)Pacific/Funafuti      | 12    | (UTC+00:00)Africa/Accra      | 268   |
| (UTC+12:00)Pacific/Kwajalein     | 13    | (UTC+00:00)Africa/Bamako     | 269   |
| (UTC+12:00)Pacific/Majuro        | 14    | (UTC+00:00)Africa/Banjul     | 270   |
| (UTC+12:00)Pacific/Nauru         | 15    | (UTC+00:00)Africa/Bissau     | 271   |
| (UTC+12:00)Pacific/Tarawa        | 16    | (UTC+00:00)Africa/Conakr     | 272   |
| (UTC+12:00)Pacific/Wake          | 17    | (UTC+00:00)Africa/Dakar      | 273   |
| (UTC+12:00)Pacific/Wallis        | 18    | (UTC+00:00)Africa/Freetow    | 274   |
| (UTC+12:00)Pacific/Fiji          | 19    | (UTC+00:00)Africa/Lome       | 275   |
| (UTC+11:00)Antarctica/Macquarie  | 20    | (UTC+00:00)Africa/Monrovia   | 276   |
| (UTC+11:00)Asia/Magadan          | 21    | (UTC+00:00)Africa/Nouakchott | 277   |

|                                      |    |                                 |     |
|--------------------------------------|----|---------------------------------|-----|
| (UTC+11:00)Asia/Sakhalin             | 22 | (UTC+00:00)Africa/Ouagadougou   | 278 |
| (UTC+11:00)Asia/Srednekolymsk        | 23 | (UTC+00:00)Africa/Sao_Tome      | 279 |
| (UTC+11:00)Pacific/Bougainville      | 24 | (UTC+00:00)Africa/Timbuktu      | 280 |
| (UTC+11:00)Pacific/Efate             | 25 | (UTC+00:00)America/Danmarkshavn | 281 |
| (UTC+11:00)Pacific/Guadalcanal       | 26 | (UTC+00:00)Atlantic/Reykjavik   | 282 |
| (UTC+11:00)Pacific/Kosrae            | 27 | (UTC+00:00)Atlantic/St_Helen    | 283 |
| (UTC+11:00)Pacific/Norfolk           | 28 | (UTC+00:00)Africa/Casablanca    | 284 |
| (UTC+11:00)Pacific/Noumea            | 29 | (UTC+00:00)Africa/El_Aaiun      | 285 |
| (UTC+11:00)Pacific/Pohnpei           | 30 | (UTC+00:00)Antarctica/Troll     | 286 |
| (UTC+11:00)Pacific/Ponape            | 31 | (UTC+00:00)Atlantic/Canary      | 287 |
| (UTC+10:30)Australia/LHI             | 32 | (UTC+00:00)Atlantic/Faeroe      | 288 |
| (UTC+10:30)Australia/Lord_Howe       | 33 | (UTC+00:00)Atlantic/Faroe       | 289 |
| (UTC+10:00)Antarctica/DumontDURville | 34 | (UTC+00:00)Atlantic/Madeira     | 290 |
| (UTC+10:00)Asia/Ust-Nera             | 35 | (UTC+00:00)Europe/Lisbon        | 291 |
| (UTC+10:00)Asia/Vladivostok          | 36 | (UTC+00:00)Portugal             | 292 |
| (UTC+10:00)Pacific/Chuuk             | 37 | (UTC+00:00)Europe/Belfast       | 293 |
| (UTC+10:00)Pacific/Port_Moresby      | 38 | (UTC+00:00)Europe/Guernsey      | 294 |
| (UTC+10:00)Pacific/Truk              | 39 | (UTC+00:00)Europe/Isle_of_Man   | 295 |
| (UTC+10:00)Pacific/Yap               | 40 | (UTC+00:00)Europe/Jersey        | 296 |
| (UTC+10:00)Australia/ACT             | 41 | (UTC+00:00)Europe/London        | 297 |
| (UTC+10:00)Australia/Canberra        | 42 | (UTC+00:00)Europe/Dublin        | 298 |
| (UTC+10:00)Australia/Currie          | 43 | (UTC+00:00)UTC                  | 299 |
| (UTC+10:00)Australia/Hobar           | 44 | (UTC-01:00)America/Scoresbysund | 300 |
| (UTC+10:00)Australia/Melbourne       | 45 | (UTC-01:00)Atlantic/Azores      | 301 |

|                                  |    |                                             |     |
|----------------------------------|----|---------------------------------------------|-----|
| (UTC+10:00)Australia/NSW         | 46 | (UTC-01:00)Atlantic/Cape_Verde              | 302 |
| (UTC+10:00)Australia/Sydney      | 47 | (UTC-02:00)America/Noronha                  | 303 |
| (UTC+10:00)Australia/Tasmania    | 48 | (UTC-02:00)Brazil/DeNoronha                 | 304 |
| (UTC+10:00)Australia/Victoria    | 49 | (UTC-02:00)Atlantic/South_Georgia           | 305 |
| (UTC+10:00)Australia/Brisbane    | 50 | (UTC-03:00)America/Araguaina                | 306 |
| (UTC+10:00)Australia/Lindeman    | 51 | (UTC-03:00)America/Bahia                    | 307 |
| (UTC+10:00)Australia/Queensland  | 52 | (UTC-03:00)America/Belem                    | 308 |
| (UTC+10:00)Pacific/Guam          | 53 | (UTC-03:00)America/Fortaleza                | 309 |
| (UTC+10:00)Pacific/Saipan        | 54 | (UTC-03:00)America/Maceio                   | 310 |
| (UTC+09:30)Australia/Adelaide    | 55 | (UTC-03:00)America/Recife                   | 311 |
| (UTC+09:30)Australia/Broken_Hill | 56 | (UTC-03:00)America/Santarem                 | 312 |
| (UTC+09:30)Australia/South       | 57 | (UTC-03:00)America/Argentina/Buenos_Aires   | 313 |
| (UTC+09:30)Australia/Yancowinna  | 58 | (UTC-03:00)America/Argentina/Catamarca      | 314 |
| (UTC+09:30)Australia/Darwin      | 59 | (UTC-03:00)America/Argentina/ComodRivadavia | 315 |
| (UTC+09:30)Australia/North       | 60 | (UTC-03:00)America/Argentina/Cordoba        | 316 |
| (UTC+09:00)Asia/Chita            | 61 | (UTC-03:00)America/Argentina/Jujuy          | 317 |
| (UTC+09:00)Asia/Khandyga         | 62 | (UTC-03:00)America/Argentina/La_Rioja       | 318 |
| (UTC+09:00)Asia/Yakutsk          | 63 | (UTC-03:00)America/Argentina/Mendoza        | 319 |
| (UTC+09:00)Asia/Dili             | 64 | (UTC-03:00)America/Argentina/Rio_Gallego    | 320 |
| (UTC+09:00)Pacific/Palau         | 65 | (UTC-03:00)America/Argentina/Salta          | 321 |
| (UTC+09:00)Asia/Jayapura         | 66 | (UTC-03:00)America/Argentina/San_Juan       | 322 |

|                               |    |                                          |     |
|-------------------------------|----|------------------------------------------|-----|
| (UTC+09:00)Asia/Seoul         | 67 | (UTC-03:00)America/Argentina/<br>San_Lui | 323 |
| (UTC+09:00)Asia/Tokyo         | 68 | (UTC-03:00)America/Argentina/<br>Tucuman | 324 |
| (UTC+08:45)Australia/Eucla    | 69 | (UTC-03:00)America/Argentina/<br>Ushuaia | 325 |
| (UTC+08:30)Asia/Pyongyang     | 70 | (UTC-03:00)America/Buenos_Aires          | 326 |
| (UTC+08:00)Asia/Brunei        | 71 | (UTC-03:00)America/Catamarca             | 327 |
| (UTC+08:00)Asia/Choibalsan    | 72 | (UTC-03:00)America/Jujuy                 | 328 |
| (UTC+08:00)Asia/Irkutsk       | 73 | (UTC-03:00)America/Mendoz                | 329 |
| (UTC+08:00)Asia/Kuala_Lumpur  | 74 | (UTC-03:00)America/Rosario               | 330 |
| (UTC+08:00)Asia/Kuching       | 75 | (UTC-03:00)America/Cayenne               | 331 |
| (UTC+08:00)Asia/Manila        | 76 | (UTC-03:00)America/Montevideo            | 332 |
| (UTC+08:00)Asia/Singapore     | 77 | (UTC-03:00)America/Paramarib             | 333 |
| (UTC+08:00)Asia/Ulaanbaatar   | 78 | (UTC-03:00)America/Punta_Arenas          | 334 |
| (UTC+08:00)Asia/Ulan_Bator    | 79 | (UTC-03:00)America/Santiago              | 335 |
| (UTC+08:00)Asia/Chongqing     | 80 | (UTC-03:00)Antarctica/Palme              | 336 |
| (UTC+08:00)Asia/Chungking     | 81 | (UTC-03:00)Chile/Continental             | 337 |
| (UTC+08:00)Asia/Harbin        | 82 | (UTC-03:00)Antarctica/Rothera            | 338 |
| (UTC+08:00)Asia/Macao         | 83 | (UTC-03:00)Atlantic/Stanley              | 339 |
| (UTC+08:00)Asia/Macau         | 84 | (UTC-03:00)America/Miquelon              | 340 |
| (UTC+08:00)Asia/Shanghai      | 85 | (UTC-03:00)America/Sao_Paulo             | 341 |
| (UTC+08:00)Asia/Taipei        | 86 | (UTC-03:00)Brazil/East                   | 342 |
| (UTC+08:00)Asia/Hong_Kong     | 87 | (UTC-03:30)America/St_Johns              | 343 |
| (UTC+08:00)Asia/Makassar      | 88 | (UTC-03:30)Canada/Newfoundland           | 344 |
| (UTC+08:00)Asia/Ujung_Pandang | 89 | (UTC-04:00)America/Anguilla              | 345 |

|                              |     |                                  |     |
|------------------------------|-----|----------------------------------|-----|
| (UTC+08:00)Australia/Perth   | 90  | (UTC-04:00)America/Antigua       | 346 |
| (UTC+08:00)Australia/West    | 91  | (UTC-04:00)America/Aruba         | 347 |
| (UTC+07:00)Antarctica/Davis  | 92  | (UTC-04:00)America/Barbados      | 348 |
| (UTC+07:00)Asia/Bangkok      | 93  | (UTC-04:00)America/Blanc-Sablon  | 349 |
| (UTC+07:00)Asia/Ho_Chi_Minh  | 94  | (UTC-04:00)America/Curacao       | 350 |
| (UTC+07:00)Asia/Phnom_Penh   | 95  | (UTC-04:00)America/Dominica      | 351 |
| (UTC+07:00)Asia/Saigon       | 96  | (UTC-04:00)America/Grand_Turk    | 352 |
| (UTC+07:00)Asia/Vientiane    | 97  | (UTC-04:00)America/Grenada       | 353 |
| (UTC+07:00)Asia/Barnaul      | 98  | (UTC-04:00)America/Guadeloupe    | 354 |
| (UTC+07:00)Asia/Hovd         | 99  | (UTC-04:00)America/Kralendijk    | 355 |
| (UTC+07:00)Asia/Krasnoyarsk  | 100 | (UTC-04:00)America/Lower_Princes | 356 |
| (UTC+07:00)Asia/Novokuznetsk | 101 | (UTC-04:00)America/Marigot       | 357 |
| (UTC+07:00)Indian/Christmas  | 102 | (UTC-04:00)America/Martinique    | 358 |
| (UTC+07:00)Asia/Jakarta      | 103 | (UTC-04:00)America/Montserra     | 359 |
| (UTC+07:00)Asia/Pontianak    | 104 | (UTC-04:00)America/Port_of_Spain | 360 |
| (UTC+06:30)Asia/Rangoon      | 105 | (UTC-04:00)America/Puerto_Rico   | 361 |
| (UTC+06:30)Asia/Yangon       | 106 | (UTC-04:00)America/Santo_Domingo | 362 |
| (UTC+06:30)Indian/Cocos      | 107 | (UTC-04:00)America/St_Barthelemy | 363 |
| (UTC+06:00)Antarctica/Vostok | 108 | (UTC-04:00)America/St_Kitts      | 364 |
| (UTC+06:00)Asia/Almaty       | 109 | (UTC-04:00)America/St_Lucia      | 365 |
| (UTC+06:00)Asia/Bishkek      | 110 | (UTC-04:00)America/St_Thomas     | 366 |
| (UTC+06:00)Asia/Dacca        | 111 | (UTC-04:00)America/St_Vincent    | 367 |
| (UTC+06:00)Asia/Dhaka        | 112 | (UTC-04:00)America/Tortola       | 368 |
| (UTC+06:00)Asia/Kashgar      | 113 | (UTC-04:00)America/Virgin        | 369 |

|                               |     |                                  |     |
|-------------------------------|-----|----------------------------------|-----|
| (UTC+06:00)Asia/Urumqi        | 114 | (UTC-04:00)America/Asuncion      | 370 |
| (UTC+06:00)Asia/Omsk          | 115 | (UTC-04:00)America/Boa_Vista     | 371 |
| (UTC+06:00)Asia/Qyzylorda     | 116 | (UTC-04:00)America/Manaus        | 372 |
| (UTC+06:00)Asia/Thimbu        | 117 | (UTC-04:00)America/Porto_Velho   | 373 |
| (UTC+06:00)Asia/Thimphu       | 118 | (UTC-04:00)Brazil/West           | 374 |
| (UTC+06:00)Indian/Chagos      | 119 | (UTC-04:00)America/Guyana        | 375 |
| (UTC+06:00)Asia/Novosibirsk   | 120 | (UTC-04:00)America/La_Paz        | 376 |
| (UTC+06:00)Asia/Tomsk         | 121 | (UTC-04:00)America/Caracas       | 377 |
| (UTC+05:45)Asia/Kathmandu     | 122 | (UTC-04:00)America/Campo_Grande  | 378 |
| (UTC+05:45)Asia/Katmandu      | 123 | (UTC-04:00)America/Cuiaba        | 379 |
| (UTC+05:30)Asia/Calcutta      | 124 | (UTC-04:00)America/Glace_Bay     | 380 |
| (UTC+05:30)Asia/Colombo       | 125 | (UTC-04:00)America/Goose_Bay     | 381 |
| (UTC+05:30)Asia/Kolkata       | 126 | (UTC-04:00)America/Halifax       | 382 |
| (UTC+05:00)Antarctica/Mawson  | 127 | (UTC-04:00)America/Moncton       | 383 |
| (UTC+05:00)Asia/Aqttau        | 128 | (UTC-04:00)America/Thule         | 384 |
| (UTC+05:00)Asia/Aqtobe        | 129 | (UTC-04:00)Atlantic/Bermuda      | 385 |
| (UTC+05:00)Asia/Ashgabat      | 130 | (UTC-04:00)Canada/Atlantic       | 386 |
| (UTC+05:00)Asia/Ashkhabad     | 131 | (UTC-05:00)America/Atikokan      | 387 |
| (UTC+05:00)Asia/Atyrau        | 132 | (UTC-05:00)America/Cancun        | 388 |
| (UTC+05:00)Asia/Dushanbe      | 133 | (UTC-05:00)America/Cayman        | 389 |
| (UTC+05:00)Asia/Oral          | 134 | (UTC-05:00)America/Coral_Harbour | 390 |
| (UTC+05:00)Asia/Samarkand     | 135 | (UTC-05:00)America/Jamaica       | 391 |
| (UTC+05:00)Asia/Tashkent      | 136 | (UTC-05:00)America/Panama        | 392 |
| (UTC+05:00)Asia/Yekaterinburg | 137 | (UTC-05:00)America/Bogota        | 393 |

|                             |     |                                             |     |
|-----------------------------|-----|---------------------------------------------|-----|
| (UTC+05:00)Indian/Kerguelen | 138 | (UTC-05:00)America/Eirunepe                 | 394 |
| (UTC+05:00)Indian/Maldives  | 139 | (UTC-05:00)America/Porto_Acr                | 395 |
| (UTC+05:00)Asia/Karachi     | 140 | (UTC-05:00)America/Rio_Branco               | 396 |
| (UTC+04:30)Asia/Kabul       | 141 | (UTC-05:00)Brazil/Acre                      | 397 |
| (UTC+04:00)Asia/Baku        | 142 | (UTC-05:00)America/Guayaquil                | 398 |
| (UTC+04:00)Asia/Dubai       | 143 | (UTC-05:00)America/Lima                     | 399 |
| (UTC+04:00)Asia/Muscat      | 144 | (UTC-05:00)America/Detroit                  | 400 |
| (UTC+04:00)Asia/Tbilisi     | 145 | (UTC-05:00)America/Fort_Wayne               | 401 |
| (UTC+04:00)Asia/Yerevan     | 146 | (UTC-05:00)America/Indiana/<br>Indianapolis | 402 |
| (UTC+04:00)Europe/Astrakhan | 147 | (UTC-05:00)America/Indiana/Marengo          | 403 |
| (UTC+04:00)Europe/Samara    | 148 | (UTC-05:00)America/Indiana/<br>Petersburg   | 404 |
| (UTC+04:00)Europe/Ulyanovsk | 149 | (UTC-05:00)America/Indiana/Vevay            | 405 |
| (UTC+04:00)Indian/Mahe      | 150 | (UTC-05:00)America/Indiana/Vincennes        | 406 |
| (UTC+04:00)Indian/Mauritius | 151 | (UTC-05:00)America/Indiana/Winamac          | 407 |
| (UTC+04:00)Indian/Reunion   | 152 | (UTC-05:00)America/Indianapoli              | 408 |
| (UTC+03:30)Asia/Tehran      | 153 | (UTC-05:00)America/Iqaluit                  | 409 |
| (UTC+03:00)Asia/Famagusta   | 154 | (UTC-05:00)America/Kentucky/Louisville      | 410 |
| (UTC+03:00)Asia/Istanbul    | 155 | (UTC-05:00)America/Kentucky/Monticello      | 411 |
| (UTC+03:00)Europe/Istanbul  | 156 | (UTC-05:00)America/Louisville               | 412 |
| (UTC+03:00)Europe/Kirov     | 157 | (UTC-05:00)America/Montreal                 | 413 |
| (UTC+03:00)Europe/Minsk     | 158 | (UTC-05:00)America/Nassau                   | 414 |
| (UTC+03:00)Europe/Saratov   | 159 | (UTC-05:00)America/New_York                 | 415 |

|                                 |     |                                     |     |
|---------------------------------|-----|-------------------------------------|-----|
| (UTC+03:00)Europe/Volgograd     | 160 | (UTC-05:00)America/Nipigon          | 416 |
| (UTC+03:00)Africa/Addis_Ababa   | 161 | (UTC-05:00)America/Pangnirtun       | 417 |
| (UTC+03:00)Africa/Asmara        | 162 | (UTC-05:00)America/Port-au-Prince   | 418 |
| (UTC+03:00)Africa/Asmera        | 163 | (UTC-05:00)America/Thunder_Bay      | 419 |
| (UTC+03:00)Africa/Dar_es_Salaam | 164 | (UTC-05:00)America/Toronto          | 420 |
| (UTC+03:00)Africa/Djibouti      | 165 | (UTC-05:00)Canada/Eastern           | 421 |
| (UTC+03:00)Africa/Juba          | 166 | (UTC-05:00)US/Eastern               | 422 |
| (UTC+03:00)Africa/Kampala       | 167 | (UTC-05:00)US/East-Indiana          | 423 |
| (UTC+03:00)Africa/Khartoum      | 168 | (UTC-05:00)US/Michigan              | 424 |
| (UTC+03:00)Africa/Mogadishu     | 169 | (UTC-05:00)America/Havana           | 425 |
| (UTC+03:00)Africa/Nairobi       | 170 | (UTC-06:00)America/Bahia_Banderas   | 426 |
| (UTC+03:00)Indian/Antananarivo  | 171 | (UTC-06:00)America/Merida           | 427 |
| (UTC+03:00)Indian/Comoro        | 172 | (UTC-06:00)America/Mexico_City      | 428 |
| (UTC+03:00)Indian/Mayotte       | 173 | (UTC-06:00)America/Monterrey        | 429 |
| (UTC+03:00)Antarctica/Syowa     | 174 | (UTC-06:00)Mexico/General           | 430 |
| (UTC+03:00)Asia/Aden            | 175 | (UTC-06:00)America/Belize           | 431 |
| (UTC+03:00)Asia/Baghdad         | 176 | (UTC-06:00)America/Costa_Rica       | 432 |
| (UTC+03:00)Asia/Bahrain         | 177 | (UTC-06:00)America/El_Salvador      | 433 |
| (UTC+03:00)Asia/Kuwait          | 178 | (UTC-06:00)America/Guatemala        | 434 |
| (UTC+03:00)Asia/Qatar           | 179 | (UTC-06:00)America/Managua          | 435 |
| (UTC+03:00)Asia/Riyadh          | 180 | (UTC-06:00)America/Regina           | 436 |
| (UTC+03:00)Europe/Moscow        | 181 | (UTC-06:00)America/Swift_Current    | 437 |
| (UTC+03:00)Europe/Simferopol    | 182 | (UTC-06:00)America/Tegucigalpa      | 438 |
| (UTC+02:00)Africa/Blantyre      | 183 | (UTC-06:00)Canada/East-Saskatchewan | 439 |

|                                |     |                                           |     |
|--------------------------------|-----|-------------------------------------------|-----|
| (UTC+02:00)Africa/Bujumbura    | 184 | (UTC-06:00)Canada/Saskatchewan            | 440 |
| (UTC+02:00)Africa/Gaborone     | 185 | (UTC-06:00)America/Chicago                | 441 |
| (UTC+02:00)Africa/Harare       | 186 | (UTC-06:00)America/Indiana/Knox           | 442 |
| (UTC+02:00)Africa/Kigali       | 187 | (UTC-06:00)America/Indiana/Tell_City      | 443 |
| (UTC+02:00)Africa/Lubumbashi   | 188 | (UTC-06:00)America/Knox_IN                | 444 |
| (UTC+02:00)Africa/Lusak        | 189 | (UTC-06:00)America/Matamoros              | 445 |
| (UTC+02:00)Africa/Maputo       | 190 | (UTC-06:00)America/Menominee              | 446 |
| (UTC+02:00)Africa/Cairo        | 191 | (UTC-06:00)America/North_Dakota/Beulah    | 447 |
| (UTC+02:00)Africa/Tripoli      | 192 | (UTC-06:00)America/North_Dakota/Center    | 448 |
| (UTC+02:00)Europe/Kaliningrad  | 193 | (UTC-06:00)America/North_Dakota/New_Salem | 449 |
| (UTC+02:00)Africa/Johannesburg | 194 | (UTC-06:00)America/Rainy_River            | 450 |
| (UTC+02:00)Africa/Maseru       | 195 | (UTC-06:00)America/Rankin_Inlet           | 451 |
| (UTC+02:00)Africa/Mbabane      | 196 | (UTC-06:00)America/Resolute               | 452 |
| (UTC+02:00)Asia/Amman          | 197 | (UTC-06:00)America/Winnipeg               | 453 |
| (UTC+02:00)Asia/Beirut         | 198 | (UTC-06:00)Canada/Central                 | 454 |
| (UTC+02:00)Asia/Damascus       | 199 | (UTC-06:00)US/Central                     | 455 |
| (UTC+02:00)Asia/Gaza           | 200 | (UTC-06:00)US/Indiana-Starke              | 456 |
| (UTC+02:00)Asia/Hebron         | 201 | (UTC-06:00)Pacific/Galapagos              | 457 |
| (UTC+02:00)Asia/Nicosia        | 202 | (UTC-07:00)America/Boise                  | 458 |
| (UTC+02:00)Europe/Athens       | 203 | (UTC-07:00)America/Cambridge_Bay          | 459 |
| (UTC+02:00)Europe/Bucharest    | 204 | (UTC-07:00)America/Denver                 | 460 |
| (UTC+02:00)Europe/Helsinki     | 205 | (UTC-07:00)America/Edmonton               | 461 |
| (UTC+02:00)Europe/Kiev         | 206 | (UTC-07:00)America/Inuvik                 | 462 |

|                               |     |                                 |     |
|-------------------------------|-----|---------------------------------|-----|
| (UTC+02:00)Europe/Mariehamn   | 207 | (UTC-07:00)America/Ojinag       | 463 |
| (UTC+02:00)Europe/Nicosia     | 208 | (UTC-07:00)America/Shiprock     | 464 |
| (UTC+02:00)Europe/Riga        | 209 | (UTC-07:00)America/Yellowknife  | 465 |
| (UTC+02:00)Europe/Sofia       | 210 | (UTC-07:00)Canada/Mountain      | 466 |
| (UTC+02:00)Europe/Tallinn     | 211 | (UTC-07:00)US/Mountain          | 467 |
| (UTC+02:00)Europe/Uzhgorod    | 212 | (UTC-07:00)America/Chihuahua    | 468 |
| (UTC+02:00)Europe/Vilnius     | 213 | (UTC-07:00)America/Mazatlan     | 469 |
| (UTC+02:00)Europe/Zaporozhye  | 214 | (UTC-07:00)Mexico/BajaSur       | 470 |
| (UTC+02:00)Turkey             | 215 | (UTC-07:00)America/Creston      | 471 |
| (UTC+02:00)Europe/Chisinau    | 216 | (UTC-07:00)America/Dawson_Creek | 472 |
| (UTC+02:00)Europe/Tiraspol    | 217 | (UTC-07:00)America/Fort_Nelson  | 473 |
| (UTC+01:00)Africa/Algier      | 218 | (UTC-07:00)America/Hermosillo   | 474 |
| (UTC+01:00)Africa/Tunis       | 219 | (UTC-07:00)America/Phoenix      | 475 |
| (UTC+01:00)Africa/Bangui      | 220 | (UTC-07:00)US/Arizona           | 476 |
| (UTC+01:00)Africa/Brazzaville | 221 | (UTC-08:00)America/Dawson       | 477 |
| (UTC+01:00)Africa/Douala      | 222 | (UTC-08:00)America/Ensenada     | 478 |
| (UTC+01:00)Africa/Kinshasa    | 223 | (UTC-08:00)America/Los_Angeles  | 479 |
| (UTC+01:00)Africa/Lagos       | 224 | (UTC-08:00)America/Santa_Isabel | 480 |
| (UTC+01:00)Africa/Libreville  | 225 | (UTC-08:00)America/Tijuana      | 481 |
| (UTC+01:00)Africa/Luanda      | 226 | (UTC-08:00)America/Vancouve     | 482 |
| (UTC+01:00)Africa/Malabo      | 227 | (UTC-08:00)America/Whitehorse   | 483 |
| (UTC+01:00)Africa/Ndjamena    | 228 | (UTC-08:00)Canada/Pacific       | 484 |
| (UTC+01:00)Africa/Niamey      | 229 | (UTC-08:00)Canada/Yukon         | 485 |
| (UTC+01:00)Africa/Porto-Novo  | 230 | (UTC-08:00)Mexico/BajaNorte     | 486 |

|                                |     |                               |     |
|--------------------------------|-----|-------------------------------|-----|
| (UTC+01:00)Africa/Ceuta        | 231 | (UTC-08:00)US/Pacific         | 487 |
| (UTC+01:00)Arctic/Longyearbyen | 232 | (UTC-08:00)US/Pacific-New     | 488 |
| (UTC+01:00)Atlantic/Jan_Mayen  | 233 | (UTC-08:00)Pacific/Pitcairn   | 489 |
| (UTC+01:00)Europe/Amsterdam    | 234 | (UTC-09:00)America/Anchorage  | 490 |
| (UTC+01:00)Europe/Andorra      | 235 | (UTC-09:00)America/Juneau     | 491 |
| (UTC+01:00)Europe/Belgrade     | 236 | (UTC-09:00)America/Metlakatla | 492 |
| (UTC+01:00)Europe/Berlin       | 237 | (UTC-09:00)America/Nome       | 493 |
| (UTC+01:00)Europe/Bratislava   | 238 | (UTC-09:00)America/Sitka      | 494 |
| (UTC+01:00)Europe/Brussels     | 239 | (UTC-09:00)America/Yakutat    | 495 |
| (UTC+01:00)Europe/Budapest     | 240 | (UTC-09:00)US/Alaska          | 496 |
| (UTC+01:00)Europe/Busingen     | 241 | (UTC-09:00)Pacific/Gambier    | 497 |
| (UTC+01:00)Europe/Copenhagen   | 242 | (UTC-09:30)Pacific/Marquesas  | 498 |
| (UTC+01:00)Europe/Gibraltar    | 243 | (UTC-10:00)America/Adak       | 499 |
| (UTC+01:00)Europe/Ljubljana    | 244 | (UTC-10:00)America/Atka       | 500 |
| (UTC+01:00)Europe/Luxembourg   | 245 | (UTC-10:00)US/Aleutian        | 501 |
| (UTC+01:00)Europe/Madrid       | 246 | (UTC-10:00)Pacific/Honolulu   | 502 |
| (UTC+01:00)Europe/Malta        | 247 | (UTC-10:00)Pacific/Johnston   | 503 |
| (UTC+01:00)Europe/Monaco       | 248 | (UTC-10:00)US/Hawaii          | 504 |
| (UTC+01:00)Europe/Oslo         | 249 | (UTC-10:00)Pacific/Rarotonga  | 505 |
| (UTC+01:00)Europe/Paris        | 250 | (UTC-10:00)Pacific/Tahiti     | 506 |
| (UTC+01:00)Europe/Podgorica    | 251 | (UTC-11:00)Pacific/Midwa      | 507 |
| (UTC+01:00)Europe/Prague       | 252 | (UTC-11:00)Pacific/Pago_Pago  | 508 |
| (UTC+01:00)Europe/Rome         | 253 | (UTC-11:00)Pacific/Samoa      | 509 |
| (UTC+01:00)Europe/San_Marino   | 254 | (UTC-11:00)US/Samoa           | 510 |

|                                   |            |                                |            |
|-----------------------------------|------------|--------------------------------|------------|
| <b>(UTC+01:00)Europe/Sarajevo</b> | <b>255</b> | <b>(UTC-11:00)Pacific/Niue</b> | <b>511</b> |
| <b>(UTC+01:00)Europe/Skopje</b>   | <b>256</b> | <b>(UTC+02:00)Israel</b>       | <b>512</b> |

## Appendix C Access Point Compatibility Table

| AP Brand              | Mobile Phone Brand |                   |                 |                    |       |                |                        |
|-----------------------|--------------------|-------------------|-----------------|--------------------|-------|----------------|------------------------|
|                       | Apple<br>iPhone 7  | ASUS<br>ZenFone 4 | HTC U12<br>life | Huawei Mate<br>20X | Mi A2 | Redmi<br>note7 | Samsung<br>Galaxy S10+ |
| ASUS Blue Cave AC2600 | ○                  | △                 | ○               | ×                  | ×     | ○              | ○                      |
| Belkin G54/N150       | ○                  | ○                 | ○               | ○                  | ○     | ○              | ○                      |
| D-Link DIR-615        | ○                  | △                 | ○               | ○                  | ○     | ○              | ○                      |
| Linksys WRT1900ACS    | ○                  | ×                 | ×               | ×                  | ×     | ×              | ○                      |
| NETGEAR N300 WNR2000  | ○                  | ○                 | ○               | ○                  | ○     | ○              | ○                      |
| Tenda N301            | ○                  | ○                 | ○               | ○                  | ○     | ○              | ○                      |
| TP-Link TL-WR940N     | ○                  | ○                 | ○               | ○                  | ○     | ○              | ○                      |
| TP-Link WR841N        | ○                  | ○                 | ○               | ○                  | ○     | △              | ○                      |
| WAVLINK ARK N300      | ○                  | ○                 | ○               | ○                  | ○     | ○              | ○                      |

This table shows the success rate of Smart Config connection setting for the connection of each brands of mobile phones and routers.

- : High (80%-100%)      Compatible  
 △ : Possible (40%-60%)      Possibly Work  
 × : Low (0%-20%)      Incompatible