


B1-CM25 Appearance

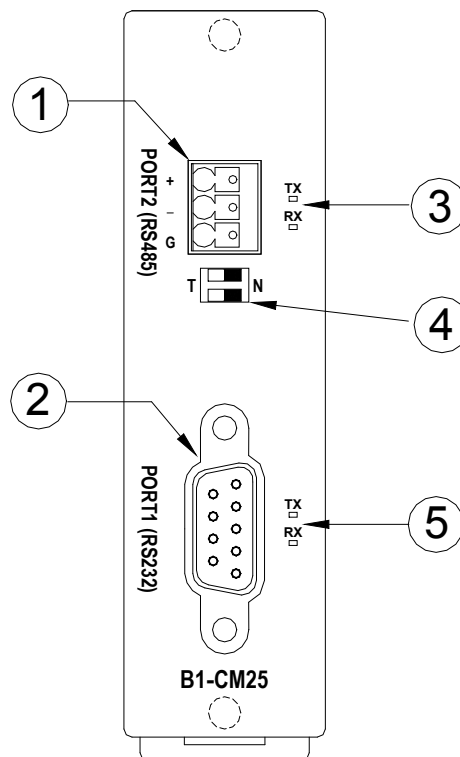

- ① Port2 connector : For RS485 signal.
- ② Port1 connector : For RS232 signal.
- ③ Port2 status indicator :
 - RX : ON indicates that Port 2 is receiving messages.
 - TX : ON indicates that the Port 2 is sending messages.
- ④ Port2 terminating resistor switch : This switch is used to enable/disable the Port2 RS485 terminating resistor. T means the terminating resistor is activated. N means the terminating resistor is not activated.
- ⑤ Port1 status indicator :
 - RX : ON indicates that Port 1 is receiving messages.
 - TX : ON indicates that the Port 1 is sending messages.